
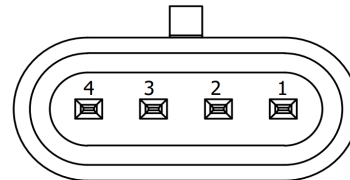


# TLL155 Series Specification Sheet

Customer Information	
<b>Customer:</b>	<b>Date:</b>
<b>Contact:</b>	<b>Order No:</b>
<b>Drawing No:</b>	<b>Part No:</b>

Sensor Information	
<b>Applications:</b>	Static      Mobile
<b>Liquid Type:</b>	
<b>Probe Length:</b>	mm
<b>Sensor Full Point:</b>	mm
(Minimum / Standard 27 mm)	
<b>Thread Size:</b>	
<b>Output Type:</b>	Resistive      Voltage      Current
<b>Output Range (Empty/Full):</b>	
<b>Alarm:</b>	Standard 12.5% of Active Range Close on Fall
<b>Mark with following part number:</b>	
<b>Special Features:</b>	
If you require a C/K16 connector kit or a S/K155 shortening kit, please add to your order.	

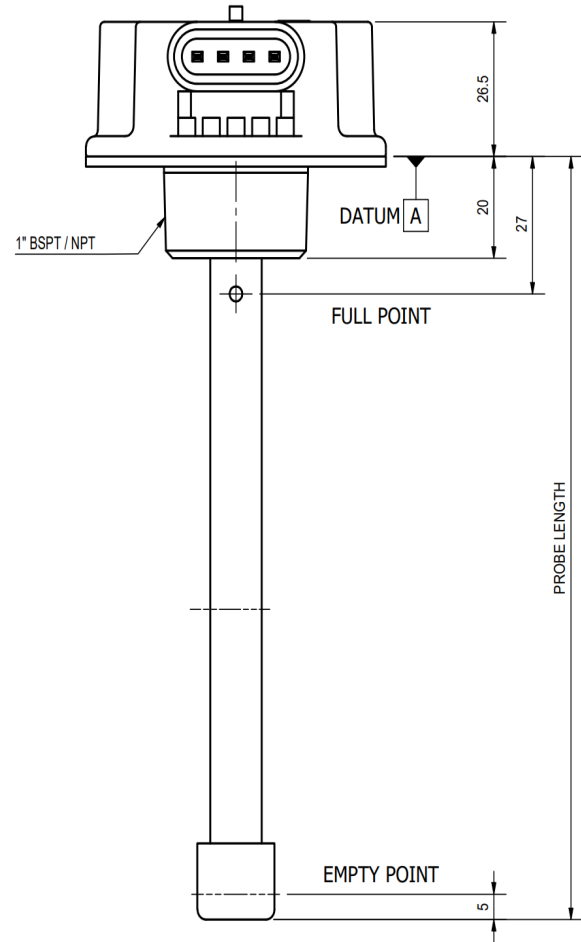

SUPERSEAL 1.5 CONNECTOR (282106-1) PINS			
PIN 4	PIN 3	PIN 2	PIN 1
OUTPUT SIGNAL	LOW-LEVEL ALARM	GROUND	SUPPLY

For Rochester Sensors Use		
Cut Lengths:		
Outer tube:	mm	Inner rod: mm
Rochester Sensors Part No.:		
Action:	Initials	Date
Completed by:		
Engineering Approval:		
BOM/Method Created:		
BOM/Method Approved		

E. & O. E. © Rochester Sensors.

Since the suitability of these products depends upon a wide range of factors not in our control, Rochester Sensors UK Limited expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Rochester Sensors UK Limited reserves the right to make material changes, and or technical changes without notification.